


SPECIFICATIONS

AVAILABLE RANGES: 1,000g TO 100 lb
 SUPPLY: 5 VDC
 OUTPUT: 2 mV/V NOMINAL
 NONLINEARITY: ± .50% F.S.
 HYSTERESIS: ± .50% F.S.
 COMPENSATED TEMPERATURE: 60°F TO 160°F
 TEMPERATURE EFFECT:
 ON ZERO: ±.01% F.S./°F
 ON SPAN: ±.02% Rdg./°F
 BRIDGE RESISTANCE: 350 Ohm NOMINAL
 CASE MATERIAL: STAINLESS STEEL

4-CONDUCTOR
 TWISTED LEADS

WIRING CODE	
COLOR	DESIGNATION
RED	(+)EXCITATION
BLACK	(-)EXCITATION
GREEN	(-)OUTPUT
WHITE	(+)OUTPUT

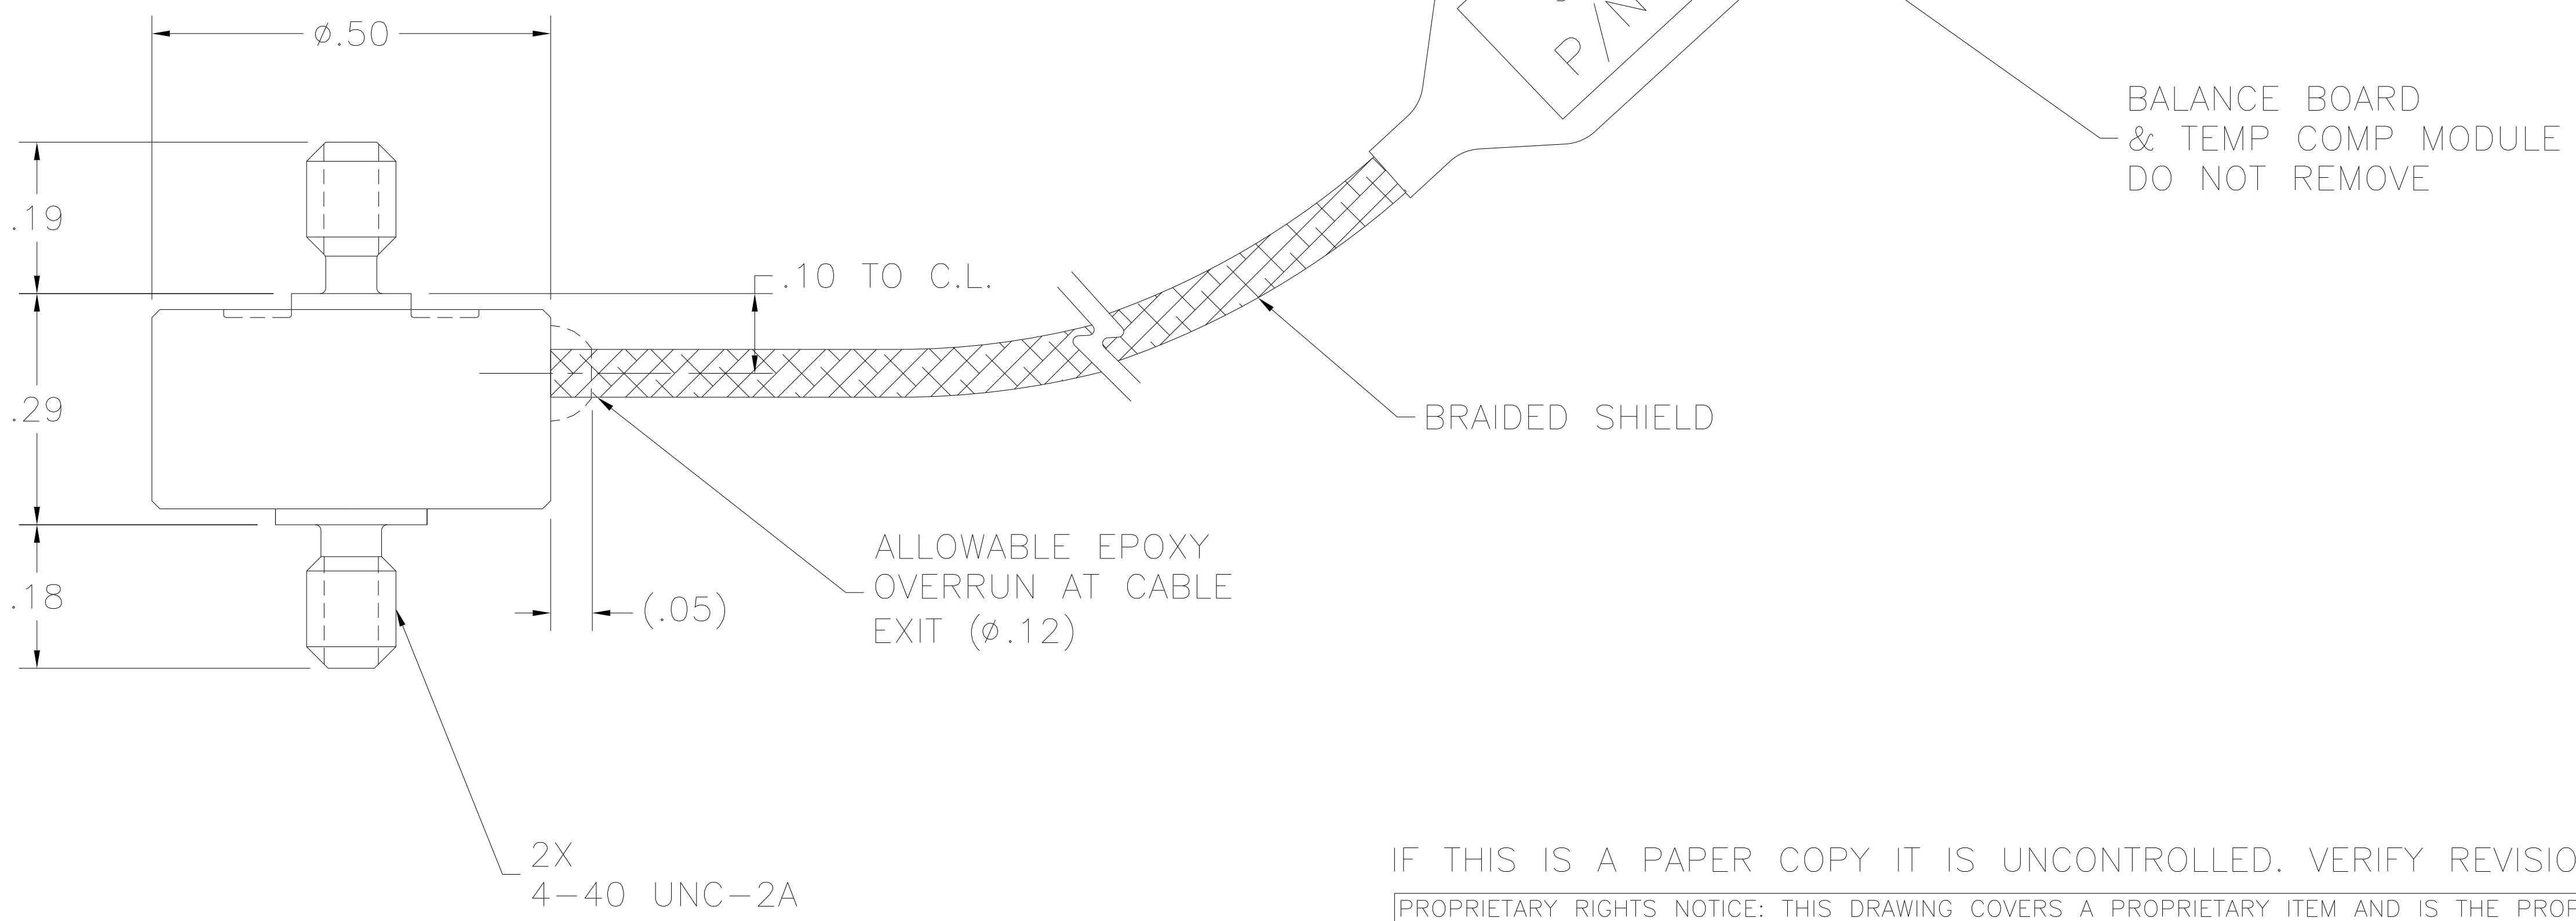

IF THIS IS A PAPER COPY IT IS UNCONTROLLED. VERIFY REVISION BEFORE USE.

PROPRIETARY RIGHTS NOTICE: THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS IN INCHES. INTERPRET PER ASME Y14.100-2000 OTHER HONEYWELL STDS MAY APPLY. ALL FILLETS & CORNERS .005R MAX DEBURR & BREAK SHARP CORNERS	E 05/20/2005	ADD CABLE EXIT DETAILS	ROBINSON	RJG	CMW
	D 07/30/2004	04-345: UPDATE TO CURRENT STANDARDS	DETRICK	RJG	CMW
	REV	DESCRIPTION	REV BY	CHK BY	APV BY
DRW: BAKER 09/19/1978		CHK: MENKE 08/20/1993	MFG: MENKE 08/20/1993	ENG: MENKE 08/20/1993	

REV HIST	C 4530	DO NOT SCALE	<p>HONEYWELL SENSOTEC 2080 ARLINGATE LANE COLUMBUS, OHIO 43228 www.honeywell.com/sensing</p>
		.X ±.2	
		.XX ±.02	
		.XXX ±.010	
AUTOCAD		OUTLINE DRAWING, MODEL 11	
		Ø.50, STANDARD, FOIL	
		CODE IDENT NO. 51518	DOCUMENT NUMBER
		SHEET 1 OF 1	SIZE A
		000-0904-00	